



Lantana

Prirodna elegancija
Natural elegance


Lantana

Dekoratívna
funkcionalna rasvjeta
Decorative functional lighting



Pupoljak za neke, badem za druge... Bez obzira na to, nije upitna izrazito prirodna pojava modela Lantana. Ovaj prizor trenutno pruža osjećaj mirnoće i dobrodošlice, bez obzira na postavke. Nudeći ovu rijetku vrstu prirodne elegancije, ona se stapa s parkovima i vrtovima, te omekšava i ukrašava urbana područja. Zahvaljujući mogućnostima montaže, kombiniranja, te odabiru nagiba i boje, s tradicionalnim ili LED izvorom svjetlosti, Lantana je izrazito pogodna svjetiljka za bezbrojne rasvjetne kombinacije koje stapaju ukusan dizajn uz izvrsne uvjete za vožnju.

A flower bud for some, an almond for others... No doubt, however, about the very natural appearance of the Lantana model. This evocation instantly imparts a soothing sensation, always welcome whatever the setting. Offering this rare kind of natural elegance, it melts into parks and gardens, softens and embellishes urban areas. Thanks to its possibilities for fixation, assembly, angling and colors, with a traditional light source or LED, Lantana is eminently suitable for vast lighting ensembles blending tasteful design and excellent driving conditions.

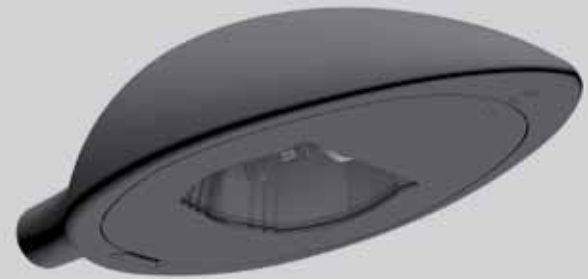

Lantana

Lantana

Dekoratívna
funkcionalna rasvjeta
Decorative functional lighting

Istaknute značajke

- Asimetrični reflektor posljednje generacije
- Jako prirodan estetski oblik poput badema ili pupoljka
- Mogućnost promjene nagiba svjetiljke na nosaču zbog estetike ili fotometrijske optimizacije
- Mogućnost usklađivanja nosača i kućišta (stvaranje originalnih setova)
- Tri vrste montaže: ravni nosač, zakrivljeni nosač i nasad za bočnu montažu
- IP 68 ventil
- Odžavanje bez uporabe alata

Tehničke karakteristike

Materijali

Kućište: Tlačno lijevani aluminij
Nosač: Tlačno lijevani aluminij
Reflektor: Presani posjajeni aluminij
Zaštita: Kaljeno staklo

Oblik zaštite

Standardno: Ravno staklo

Izvedba zaštite

Standardno: Prozirna

Optika

Vrsta: Asimetrični reflektor ili OPTICALED evo
Priključak: Kolnik

Maksimalna snaga

VTNa/MH: Lantana 6600: 150 W - Lantana 6780: 400 W

Cosmo: 140 W

OPTICALED evo: 30 LED na 1050 mA

Montaža

Bočna montaža: Ø60

Dubina ugradnje: 100 mm

Boja

Boja po izboru klijenta.

Highlights

- Last generation asymmetrical reflector
- Very natural esthetics shaped like an almond or a flower bud
- Possibility to tilt the fixture on its yoke for esthetical or photometric optimisation
- Possibility to coordinate yoke/fixture (designing original sets)
- Three mounting options: straight yoke, curved yoke, side arm
- IP 68 vent
- Tool-free maintenance

Technical characteristics

Materials

Fixture: Injected cast aluminium

Yoke: Injected cast aluminium

Reflector: Pressed bright dipped aluminium

Protection: Tempered glass

Protection Shape

Standard: Flat glass

Protection Finish

Standard: Transparent

Optical

Type: Asymmetrical reflector or OPTICALED evo

Socket side: Roadway

Maximum Power

HPS/MH: Lantana 6600: 150 W - Lantana 6780: 400 W

Cosmo: 140 W

OPTICALED evo: 30 LED @ 1050 mA

Mounting

Side mounted: Ø60

Depth of insertion: 100 mm

Color

Color as per the client's choice.



+ Prilagodljivi dekorativni nosač
Adjustable decorative yoke

+ Bočna montaža
Side mounted


+ Pristup žarulji i predspojnim
napravama
Lamp and control gear access

Električna klasa

1 i 2

Electrical class

1 and 2

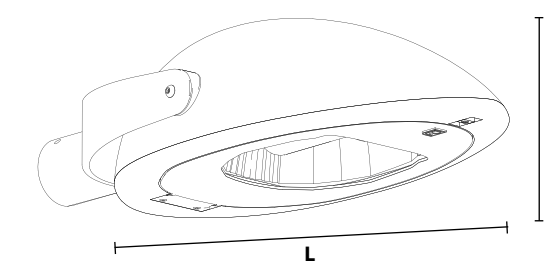

	Lantana 6600	Lantana 6780		
Težina (kg) (bez predspojnih naprava)	7	10,5		
Weight (kg) (without control gear)	7	10,5		
Aerodinamički koeficijent CxS (m ²)	0,07	0,10		
Aerodynamic coefficient CxS (m ²)	0,07	0,10		
Stupanj mehaničke zaštite				
Protection index				
Optička jedinica	IP 66	IP 66		
Optical unit	IP 66	IP 66		
Električno kućište	IP 54	IP 54		
Electrical compartment	IP 54	IP 54		
Otpornost na udar	IK 08	IK 08		
Shock resistance	IK 08	IK 08		
Dimenzije (mm)				
Size (mm)				
	L	H	L	H
	720	175	920	240

Stupanj mehaničke zaštite

Protection index

Optička jedinica.....IP 66.....IP 66

Optical unit

Električno kućište.....IP 54.....IP 54

Electrical compartment

Otpornost na udar.....IK 08.....IK 08

Shock resistance

Dimenzije (mm)

Size (mm)

Opcije / Options

IK 10 na zahtjev
Isključenje pri otvaranju
IK 10 on request
Disconnects upon opening

