

# Danis

Uspješna kombinacija!  
A successful combination!

# Danis

Urbana šetališta  
Urban promenades



Elegancija njenih čistih linija u kombinaciji s rješenjima koja zadovoljavaju zahtjeve rezidencijalne rasvjete, jamstvo su uspjeha Danis modela.

Njeno difuzno svjetlo i iznimno robusna tehnologija nude vizualnu privlačnost idealnu za stvaranje ugodnih i umirujućih ambijenata.

Njene karakteristike čine je savršenim partnerom za poboljšanje građevina s karakterom uz očuvanje smirene atmosfere.

*The elegance of its pure lines combined with a solution meeting the demands of residential lighting guarantee the success of the Danis model.*

*Its diffused light and extremely robust technology offer visual appeal ideal for creating pleasant and soothing ambiances.*

*Its characteristics make it a perfect partner for enhancing buildings of character while preserving a serene atmosphere.*







# Danis

## Istaknute značajke

- Difuzna rasvjeta
- Rezidencijalni model
- Elegantan dizajn
- Ugrađene rebrenice od nehrđajućeg čelika (za smanjenje blještanja i pojačanje osvjetljenosti tla)
- Jednostavno održavanje zahvaljujući rebrenicama postavljenim direktno na pristupnom otvoru

## Highlights

- Diffused lighting
- Residential model
- Elegant design
- Fitted with a stainless steel louver (to reduce glare and intensify the light at ground level)
- Ease of maintenance due to the louver assembly fitted directly on the access hatch

## Tehničke karakteristike

### Materijali

Sjenilo: Reljefni nehrđajući čelik  
Baza: Tlačno lijevani aluminij  
Rebrenice: Nehrđajući čelik  
Zaštita: ME (PC na zahtjev)

### Oblike zaštite

Standardno: Cjevast

### Izvedba zaštite

Standardno: Prozirna  
Opcionalno: Difuzno bijela

### Optika

Vrsta: Rebrenice ili AcuiSens

### Maksimalna snaga

VTNa/MH: 150 W  
Cosmo: 140 W  
AcuiSens: 16 LED na 800 mA

### Montaža

Na vrh: Ø60 (Ø76 na zahtjev)  
Dubina ugradnje: 80 mm

### Boja

Boja po izboru klijenta.

## Technical characteristics

### Materials

Canopy: Embossed stainless steel  
Base: Injected cast aluminium  
Louver: Stainless steel  
Protection: ME (PC on request)

### Protection Shape

Standard: Tubular

### Protection Finish

Standard: Transparent  
Optional: Diffused white

### Optical

Type: Louver or AcuiSens

### Maximum Power

HPS/MH: 150 W  
Cosmo: 140 W  
AcuiSens: 16 LED @ 800 mA

### Mounting

Top mounted: Ø60 (Ø76 on request)  
Depth of insertion: 80 mm

### Color

Color as per the client's choice.



+ Demontaža predspojnih naprava pomoću četvrtine okreta  
Control gear dismantling with quarter turn

+ Rebrenice od nehrđajućeg čelika za smanjenje blještanja  
Stainless steel glare reducing louver


+ Sjenilo od reljefnog aluminija za ograničenje svjetlosnog onečišćenja  
Embossed aluminium canopy to limit light pollution

## Električna klasa

1 i 2

## Electrical class

1 and 2

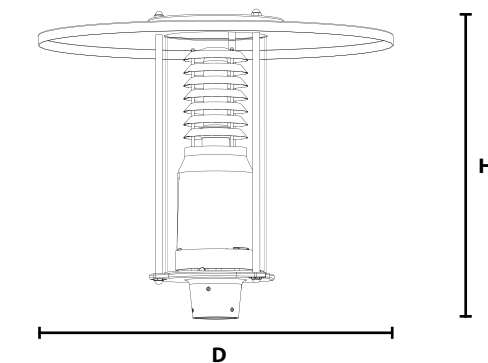

Danis  
700

Težina (kg) / Weight (kg) ..... 8,5

Aerodinamički koeficijent CxS (m<sup>2</sup>) ..... 0,12  
Aerodynamic coefficient CxS (m<sup>2</sup>)

### Stupanj mehaničke zaštite

Protection index

Optička jedinica ..... IP 54 (IP 65 na zahtjev)  
Optical unit (IP 65 on request)

Električno kućište ..... IP 54 (IP65 na zahtjev)  
Electrical compartment (IP 65 on request)

Otpornost na udar ..... IK 08  
Shock resistance

### Dimenzije (mm)

Size (mm) D H  
700 590

## Opcije/Options

IP 68 ventil  
IK 10 na zahtjev  
IP 68 vent  
IK 10 on request

