

Melanthia

Elegancija i svestranost
Elegance and versatility



Melanthia

Urbana šetališta
Urban promenades



S Melanthiom je zapuhao dašak promjene u dizajnu rasvjete. Funkcionalna i suvremena, jednako pristaje rezidencijalnim, turističkim, ruralnim i urbanim područjima. Svoju prilagodljivost zahvaljuje visokom stupnju tehničke raznovrsnosti koji pruža izbor između direktne i indirektna rasvjete.

Uvijek elegantna, Melanthia je cijenjeno rješenje kako u estetskom tako i u tehničkom pogledu.

With Melanthia, a wind of change wafts over lighting design. Functional, contemporary, it is equally at home in residential, tourist, rural or urban areas. It owes its adaptability to a high degree of technical versatility, offering the choice of direct or indirect lighting. Always elegant, Melanthia is a widely appreciated solution in both esthetic and technical terms.



Melanthia

Melanthia

Urbana šetališta
Urban promenades

Istaknute značajke

- Kućište od 100% tlačno lijevanog aluminija
- Svestranost primjene
- Mogućnost direktnog i indirektnog osvjetljenja
- Cirkularna struktura reflektora
- Veliki pomični otvor (310 mm): jednostavan pristup žarulji i predspojnim napravama
- Potpuno nepropusan IP 66

Highlights

- 100% injected cast aluminium
- Great versatility
- Direct or indirect lighting possible
- Circular structured reflector
- Large hatch opening (310 mm): easy lamp/control gear access
- Totally airtight IP 66

Tehničke karakteristike

Materijali

Kućiče: Tlačno lijevani aluminij
Reflektor: Presani posjajeni aluminij
Zaštita: ME (ME Resist na zahtjev)

Oblik zaštite

Standardno: Stožast

Izvedba zaštite

Standardno: Prozirna
Opcionalno: Difuzno bijela, mutna ili kapljčasta

Optika

Vrsta: Gornji cirkularni reflektor (za direktnu distribuciju) + donji parabolični reflektor (za indirektnu distribuciju)

Opcionalno: Rebrenice

Maksimalna snaga

VTNa/MH: 150 W

Montaža

Na vrh: Ø60 (maksimalna debljina stupa: 10 mm)

Dubina ugradnje: 60 mm

Boja

Boja po izboru klijenta.

Technical characteristics

Materials

Fixture: Injected cast aluminium
Reflector: Pressed bright dipped aluminium
Protection: ME (ME Resist on request)

Protection Shape

Standard: Conical

Protection Finish

Standard: Transparent
Optional: Diffused white, frosted or droplets

Optical

Type: Upper circular reflector (for direct distribution) + lower parabolic reflector (for indirect distribution)

Optional: Louver

Maximum Power

HPS/MH: 150 W

Mounting

Top mounted: Ø60 (max. thickness of the pole: 10 mm)

Depth of insertion: 60 mm

Color

Color as per the client's choice.



+ Veliki otvor na vrhu Ø300 mm
Large hatch opening Ø300 mm



+ 100% tlačno lijevani aluminij
100% injection cast aluminium




+ Zaobljeni bijeli aluminijski reflektor difuzne strukture
Rounded white aluminium reflector diffusing structure

Električna klasa

1 i 2

Electrical class

1 and 2

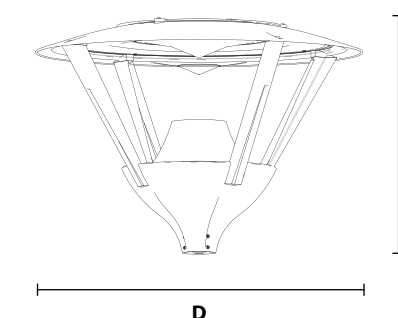

Melanthia
6740

Težina (kg) / Weight (kg) 9,5

Aerodinamički koeficijent CxS (m²) 0,13
Aerodynamic coefficient CxS (m²)

Stupanj mehaničke zaštite

Protection index

Optička jedinica IP 66

Optical unit

Električno kućište IP 66

Electrical compartment

Otpornost na udar IK 08

Shock resistance

Dimenzije (mm)

Size (mm)

D H
740 525

Opcije/Options

IP 68 ventil

IK 10 na zahtjev

IP 68 vent

IK 10 on request